

# Bambu Lab X1E

For Professionals and Engineering Applications




Authorised Benelux distributor:



Smart Industry Solutions


## Effectively Filter Particulates and VOCs, Protecting Yourself in Less Ventilated Environments

A G3 pre-filter, an H12 HEPA filter, and a high-quality coconut shell activated carbon filter are combined to provide optimal air filtration.

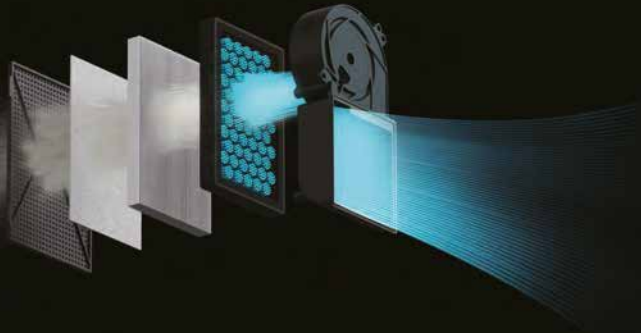

## Active Heating and Controlled Chamber Temp, Reducing Prints Warping

The active heated chamber, reaching temperatures of up to 60°C / 140°F, ensures improved print quality, particularly for filaments that are prone to warping, such as ABS and PC.

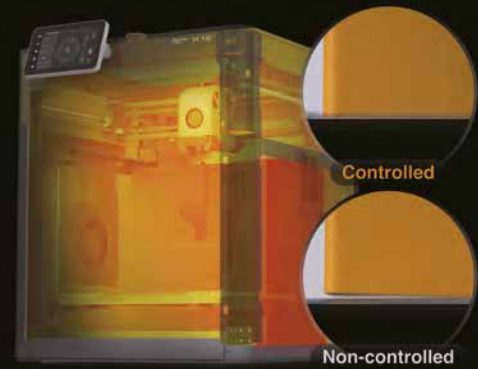

## Advanced Network Security Solutions, Protecting Your Business Integrity

The X1E provides WPA2-Enterprise Wi-Fi Authentication (EAP-PEAP/EAP-TLS/TAP-TTLS) and individual physical kill switches for both Wi-Fi and Ethernet (newly added), meeting stringent network security requirements.

## 320°C /608°F Nozzle Temperature, Unlocking Greater Heat for High-Temperature Materials

Higher nozzle temperature makes it possible to print higher performance materials with improved dimensional stability, heat resistance and mechanical performance, such as PPA-CF/GF PPS and PPS-CF.

## Tech Specs

### Supported Filament

PLA, PETG, TPU, PVA, BVOH:	Optimal
ABS, ASA, PC, PA, PET:	Superior
Carbon/Glass Fiber Reinforced PLA, PETG, PA, PET, PC, ABS, ASA:	Superior
PPA-CF/GF, PPS, PPS-CF/GF:	Ideal

### Heating

Active Chamber Heating:	Yes
Maximum Chamber Control Temperature:	60 °C

### Ethernet

Socket:	RJ45
Speed:	100 Mbps / Full Duplex

### Network Control

Ethernet:	Yes
Wireless Network:	Wi-Fi
Network Kill Switch:	Wi-Fi & Ethernet
Removable Network Module:	Yes

### Wi-Fi

Frequency Range:	2412 MHz - 2472 MHz (CE) 2412 Mhz - 2462 MHz (FCC) 2400 MHz - 2483.5 MHz (SRRC)
Transmitter Power (EIRP):	≤ 21.5 dBm (FCC) ≤ 20 dBm (CE/SRRC)
Protocol:	IEEE 802.11 b/g/n

### Air Purification

Pre-filter grade:	G3
HEPA filter grade:	H12
Activated Carbon Filter type:	Coconut Shell Granulated
VOC Filtration:	Optimal
Particulate Matter Filtration:	Yes

### Laser (CLASS 1)

Wavelength:	850 nm, 850 nm
Maximum Output of Laser Radiation	< 0.778 mW

## Bambu Lab X1E Technical Specification

### Body

---

Build Volume:	256*256*256 mm <sup>3</sup>
Chassis:	Steel
Shell:	Aluminum & Glass

### Supported Filament

---

PLA, PETG, TPU, PVA, BVOH:	Optimal
ABS, ASA, PC, PA, PET:	Superior
Carbon/Glass Fiber Reinforced PLA, PETG, PA, PET, PC, ABS, ASA:	Superior
PPA-CF/GF, PPS, PPS-CF/GF:	Ideal

### Heating

---

Active Chamber Heating:	yes
Maximum Chamber Control Temperature:	60°C

### Air Purification

---

Pre-filter grade:	G3
HEPA filter grade:	H12
Activated Carbon Filter type:	Coconut Shell Granulated
VOC Filtration:	Optimal
Particulate Matter Filtration:	Yes

### Network Control

---

Ethernet:	yes
Wireless Network:	Wi-Fi
Network Kill Switch:	Wi-Fi & Ethernet
Removable Network Module:	Yes
802.1X Network Access Control:	Yes

## Cooling

---

Part Cooling Fan:	Closed Loop Control
Hot End Fan:	Closed Loop Control
Control Board Fan:	Closed Loop Control
Chamber Temperature Regulator Fan:	Closed Loop Control
Auxiliary Part Cooling Fan:	Closed Loop Control

## ToolHead

---

Hot End:	All-Metal
Extruder Gears:	Hardened Steel
Nozzle:	Hardened Steel
Max Hot End Temperature:	320 °C
Nozzle Diameter (Included):	0.4 mm
Nozzle Diameter (Optional):	0.2 mm, 0.6 mm, 0.8 mm
Filament Cutter:	Yes
Filament Diameter:	1.75 mm

## Heatbed

---

Build Plate:	Flexible Steel Plate
Build Plate Surface (Included):	Bambu Smooth PEI Plate
Build Plate Surface (Optional):	Bambu High Temperature Plate, Bambu Textured PEI Plate, Bambu Cool Plate
Max Build Plate Temperature:	110°C@220V, 120°C@110V

## Speed

---

Max Speed of Toolhead:	500 mm/s
Max Acceleration of Toolhead:	20 m/s <sup>2</sup>
Max Hot End Flow:	32 mm <sup>3</sup> /s @ABS(Model: 150*150mm single wall; Material: Bambu ABS; Temperature: 280°C)

## Sensors

---

Bambu Micro Lidar:	Yes
Chamber Monitoring Camera:	1920*1080 Included
Door Sensor:	Yes
Filament Run Out Sensor:	Yes
Filament Odometry:	Optional with AMS
Power Loss Recover:	Yes



## Physical Dimensions

---

Dimensions:	389*389*457 mm <sup>3</sup>
Net Weight :	16 kg

## Electrical Requirements

---

Voltage:	100-240 VAC, 50/60 Hz
Max Power:	1400W@220V, 750W@110V

## Electronics

---

Display:	5-inch 1280*720 Touch Screen
Storage:	4GB EMMC and Micro SD Card Reader
Control Interface:	Touch Screen, APP, PC Application
Motion Controller:	Dual-Core Cortex M4
Application Processor:	Quad ARM A7 1.2 GHz
Neural-Network Processing Unit:	2 Tops

## Software

---

Slicer:	Bambu StudioSupport third party slicers which export standard G-code such as SuperSlicer, PrusaSlicer and Cura, but certain advanced features may not be supported.
Slicer Supported OS:	MacOS, Windows

## Wi-Fi

---

Frequency Range:	2412 MHz - 2472 MHz (CE) 2412 Mhz - 2462 MHz (FCC) 2400 MHz - 2483.5 MHz (SRRC)
Transmitter Power (EIRP):	≤ 21.5 dBm (FCC) ≤ 20 dBm (CE/SRRC)
Protocol:	IEEE 802.11 b/g/n

## Ethernet

---

Socket:	RJ45
Speed:	100 Mbps / Full Duplex

## Laser

---

Laser (CLASS 1):	850 nm、850 nm  < 0.778 mW
---------------------	---------------------------------

